

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 0 435 481 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**27.08.1997 Bulletin 1997/35**

(51) Int Cl.<sup>6</sup>: **G01N 35/00, B01F 9/10**

(21) Application number: **90313114.2**

(22) Date of filing: **04.12.1990**

**(54) Apparatus for selective agitation of reaction components**

Vorrichtung zum selektiven Rühren von Reaktionskomponenten

Dispositif pour agiter sélectivement des composants réactifs

(84) Designated Contracting States:  
**AT BE CH DE DK ES FR GB GR IT LI LU NL SE**

(30) Priority: **22.12.1989 GB 8929121**  
**18.09.1990 GB 9020352**

(43) Date of publication of application:  
**03.07.1991 Bulletin 1991/27**

(73) Proprietor: **ALFA BIOTECH S.p.A.**  
**00040 Pomezia (Roma) (IT)**

(72) Inventors:  
• **Forrest, Gordon Coulter**  
**East Horsley, Surrey, KT24 5DB (GB)**

• **Allen, Gerald John**  
**Windlesham, Surrey, GU20 6EP (GB)**

• **Missing, Phillip**  
**Ashford, Kent, TM27 9DY (GB)**

(74) Representative: **Bizley, Richard Edward et al**  
**Hepworth, Lawrence, Bryer & Bizley**  
**Merlin House**  
**Falconry Court**  
**Baker's Lane**  
**Epping Essex CM16 5DQ (GB)**

(56) References cited:  
**EP-A- 0 329 183** **WO-A-89/10785**  
**US-A- 4 808 380**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 0 435 481 B1**

## Description

This invention relates to selective component agitation apparatus, e.g. apparatus for suspending the solid phase component in solid phase-containing reaction systems or reactants, particularly in assay reaction systems and a container module for use therein.

It is usual in, for example, hospital laboratories, to carry out large numbers of diagnostic reactions on samples from one or more subjects. Such reactions are conveniently carried out using automated assay machines, programmed to carry out the necessary tests and to display and/or issue the results in some hard copy form.

Usually such machines are provided with carriers, for example racks or carousels, which hold containers with the necessary reaction components for one or more specific diagnostic tests and/or the samples to be tested themselves.

Many assays, particularly where the assay is an immunoassay, have a solid component on which a particular reagent may be bound or adsorbed. In many cases the solid component is a particulate or finely divided solid phase which is capable of suspension in aqueous media. It is of course desirable, prior to using such solid phase components, to ensure that they are adequately suspended, thus preventing inaccuracies from being introduced into the assay.

It is known in the art to mix or resuspend components by vibratory methods, for example vibratory mixers are well known which operate by placing a sample container on a vibrating element, which causes mixing in the sample. One commercial immunoassay system uses a reaction container which is suspended at its top by a resilient "web". The base of the container is not suspended but hangs "free", and is adapted to interact with a mechanical agitator to transmit a disturbance to the whole container. Somewhat similar to vibratory mixing, WO 89/10785 discloses a device capable of mixing for bio/medical analysis small amounts of at least one aqueous fluid substance in a selected container (via rotation of the bottom of the container to create a vortex). Such container(s) is/are removably mounted on a platform.

The prior art also includes structures comprising apparatus which includes a reagent/sample container-carrying carousel, which carousel is rotatable and has mounted thereon in fixed positions a number of individual containers.

EPA 0329183 discloses an analyzing apparatus which also includes a container-carrying carousel. The containers are not selectively rotated, but in use in each turn of the carousel all containers are rotated as a result of containers being rotated when they pass certain fixed circumferential positions.

In many systems found in the art, a problem with reactions which comprise a solid phase component is the cumulative effects of frequent resuspension and/or disturbance on the useful life of the solid phase reagent.

After a time, solid phase components deteriorate due to fragmenting of particles or loss of bound reagent. This is a particular problem, where, as is usually the case, a carousel carrier supports components for different tests, not all of which will be required for a particular patient sample, and some of which may be infrequently used and thus the corresponding reactants infrequently replenished. In such a situation, systems which vibrate or otherwise disturb the whole carousel carrier will cause resuspension of all solid phases carried thereon, regardless of whether or not these are needed for a particular reaction or test, leading to reactant deterioration and, ultimately, inaccurate or poor results. There are further problems in the art, in that suspension caused by vibration is unreliable and may also lead to inaccurate or poor results, and such a mixing or suspension made may result in undesirable aeration or frothing.

The present invention provides apparatus for assays involving suspending a particulate solid phase susceptible in aqueous media, comprising a platform, a discrete module removably mounted on said platform, said module including at least one independently rotatably mounted solid phase container for containing solid phase for a plurality of assays and at least one other reagent container, and means for selectively rotating said at least one container so as in use to bring about suspension of solid phase therein, said at least one container having a generally closed top with an access portion via which the contents can be accessed.

The present invention in another aspect provides a container module for use in a multi-component reaction or assay apparatus as defined above, said module being configured to fit, along with other such modules, around a substantially circular platform and said module having a first and non-rotatable reagent container and a second, independently rotatable solid phase container for containing solid phase for a plurality of assays, said container being positioned in said module to permit independent rotation thereof when said module is arranged, with other such modules, around said platform with said containers peripherally positioned in the resulting arrangement of modules and said container having a generally closed top with an access portion via which the contents can be accessed.

Preferably, the present apparatus is part of an automated immunoassay system, the platform being a carousel carrying containers for use in a number of immunoassay tests. In especially preferred embodiments, there is one of said selectively rotatable solid phase containers for each immunoassay test.

The rotatable selectively solid phase container(s) may be mounted on bearings facilitating ease of rotation, e.g. PTFE or polypropylene or other low-friction plastics material bearings. The container(s) themselves may be made of such materials, eliminating the need for special bearings due to the resulting low frictional coefficient surface of the container(s). Such container(s) may be provided with a specifically shaped base rotat-

ably to fit into a corresponding hole or recess on a platform.

Preferably, the means for selective rotating solid phase container(s) comprises a motor which can drive the container either directly or indirectly. An individual motor may be provided for each independently rotatable solid phase container, or a single motor operable with each such container may be used.

The preferred type of platform is a rotatable carousel which is adapted to carry the containers, and which by simple rotation can bring a required solid phase container into alignment with a fixed position motor drive, thereby allowing the selective rotation of a solid phase container independently of other containers on the carousel.

If desired, other containers may be positioned and mounted so as to be selectively rotatable.

Rotatable containers can be rotated via a wheel mounted on a drive shaft attached to the appropriate motor. The container is brought into frictional contact with the wheel whereby when the motor is energized and the wheel turns the container is rotated. Alternatively, the container may carry an integral gear wheel around its circumference, e.g. moulded into a lower part of the circumference, which gear meshes with a drive gear on the drive shaft.

The present apparatus can also include means to monitor spinning of the container(s), e.g. via a fixed sensor aligned to detect reflected light from a reflective area provided on the container(s). The invention also envisages the possibility of monitoring the degree of resuspension of solid phase by employing one or more transparent rotatable containers and measuring of a light absorption or scatter beam passing through such containers. In general, positive feed back may be provided to a computer controlling apparatus including the rotatable container(s) of the invention, e.g. either by a Hall effect device or by a reflective opto device to ensure that the solid phase is adequately spun. These two sensors may be of the type supplied by RS Components Ltd.

The solid phase container(s) envisaged in the present invention are provided as part of complete modules comprising several vessels, e.g. one or more liquid reagent containers together with one or more solid phase containers, wherein in each module the containers are preferably all joined by an overlaying snap fit top adapted to link the containers and to hold them in the correct alignment for mounting on the platform. If desired, at least some of the reagent containers can be provided in integral form as a one piece moulding. In such circumstances a top for linking purposes may not be necessary.

In addition, the present apparatus can be provided with means to cover or seal access openings of containers, whether solid phase containers or other vessels, while they are not in use. Such means can include, *inter alia*, foil or plastics material seals or removable plugs or caps. A single cover can be employed for a number of

containers simultaneously. The means can comprise a movable cover which, when a particular container is not specifically required, may be positioned such that the access opening of such container is covered. Such a movable cover can be adapted to cover or seal the access openings of all containers in at least one module, including the solid phase container or containers. Movement of the cover can be linked to control of the positioning of the solid phase container or its rotation means.

In general, the invention allows for the use of an independently rotatably mounted container as described above in agitating the contents thereof, e.g. for mixing or suspension purposes, in the performance of a multi-component (i.e. two or more component) reaction or assay, by selective rotation of said container in the presence of adjacently mounted component containers which are not rotated. The invention allows for such a use when applied to the reconstitution of a freeze dried reagent by loading said container with the freeze dried reagent and reconstitution fluid therefor and effecting said selective rotation. This means of reconstitution of freeze dried reagents, which are often quite unstable, using reconstitution fluids therefor in accordance with normal practice, is a very effective means of achieving dissolution of such reagents.

The invention allows the use of an independently rotatably mounted solid phase container as described above in suspending a particulate solid phase susceptible in aqueous media, in the performance of a multi-component reaction or assay, by selective rotation of said container in the presence of adjacently mounted reagent-, reaction-, and/or sample-containers which are not rotated.

Spinning or rotation of the container need not be confined to a single spin cycle in a single direction. Several cycles of rotation can be used, first in one direction and then in the reverse direction. In addition, the speed of rotation can be variable in order to ensure efficient resuspension for different types of solid phase.

The present invention provides, *inter alia*, the following advantages.

a) It avoids the need to provide, for instance, a special diaphragm to transmit vibration to agitate container content.

b) Contact between container and agitation mechanism is more critical with methods depending upon other methods, e.g. vibration.

c) Individual containers can be spun to achieve, for instance, solid phase resuspension at will selectively and without agitating adjacent containers and their contents.

d) Rotation or spinning is simple and reliable mechanically.

e) A high degree of mixing control is possible with spinning or rotation, through speed and duration of rotation, rate of acceleration/deceleration, direction of rotation etc. Spinning or rotation raises a solid phase into the body of the suspending fluid. By stopping rotation, then rotating in the opposite direction, highly efficient resuspension can be achieved very quickly and controllably. Further refinements can be made by providing baffles or other obstructions in the container which is to be spun.

f) Aeration of reagent is minimised with spinning, thus minimising microscopic or surface bubbles, and frothing, and reducing the tendency to inaccurate or poor results.

g) Spinning or rotation is a 'gentle' means of agitation, hence:

i) less likelihood of fragmenting soft or fragile particles (particles may be composed of loosely bound aggregates of smaller particles);

ii) less likelihood of denaturing sensitive proteins e.g. antibodies, attached to solid surfaces; and

iii) less likelihood of creating variable populations of very small particles (fines) which may not sediment within the timeframe available on an automated assay instrument.

h) Engineering of apparatus is simplified since a spinning vessel can be made from a 'slippery' material such as plastics material, e.g. PTFE or polypropylene, to create 'self-lubricating' bearings.

i) Monitoring of spinning, and the resulting degree of solid phase suspension, can be easily and effectively achieved in an automated apparatus.

In what follows, the invention will be described with reference to automated immunoassay equipment. The invention is not, however, limited to such an application.

The invention will now be described with reference to the accompanying drawings, in which:-

Figure 1 is a cross-section of an immunoassay apparatus solid phase container usable in the invention.

Figure 2 is a perspective view showing part of an immunoassay apparatus embodiment of the invention in which a carousel platform is provided, on which are mounted reagent "packs" and solid phase or reaction containers.

Figure 3a is an exploded side elevation and partial

cross-section showing the arrangement of various components of the embodiment of Figure 2.

Figure 3b is similar to Figure 3a, but shows a different mechanism for driving container rotation.

Figure 4 is a partially exploded perspective view of an alternative reagent pack usable in the invention and including means for monitoring container spinning.

Figure 1 shows a solid phase container 3, suitable as a reagent vessel in an automated immunoassay system. Container 3 has access opening 6, from which its contents may be withdrawn, and a shaped base portion 7, adapted to slot into a corresponding hole or recess in a support platform (not shown in this Figure). One preferred material of construction of such a container 3 is polypropylene due to its low frictional coefficient, strength and low mass.

In Figure 2, a portion of an automated immunoassay machine carousel platform 1 is shown, carrying reagent containers 2, and container 3 as shown in Figure 1. Carousel 1 may be rotated by means not shown (in the direction of the arrow).

In the apparatus of Figure 2, means for selectively rotating the solid phase containers 3 consists of a motor arrangement 12 which drives a wheel 10 via a drive shaft 11. Motor arrangement 12 may be in a fixed position or movable, and, with or without movement of motor arrangement 12, the carousel 1 may be rotated to bring wheel 10 into frictional contact with a desired container 3 such that powered rotation of wheel 10 causes the desired solid phase container 3 to rotate. Each base portion 7 of container 3 fits into a corresponding recess 13 adjacent the periphery 9 of carousel 1. Due to the "slippery" nature of containers 3, they are able to rotate in recesses 13.

Reagent containers 2 having access openings 5 mounted on carousel 1 are provided as "packs" consisting of two reagent containers 2 together with a corresponding solid phase or reaction container 3. Containers 2 and 3 are held together by a snap-fit pack top 4 which fits over reagent container access openings 5 and the respective solid phase container access opening 6 without obstruction. In addition, rotation of container 3 is not impeded by the nature of the fit.

In operation of the apparatus, bringing a desired container 3 into contact with wheel 10 allows that container 3 to be selectively spun or rotated, this causing the suspension of any solid phase contained therein but without moving adjacent containers. Furthermore, after any given test (and a pack of two reagent containers 2 and one container 3 are usually associated with one particular immunoassay test), rotation of carousel 1 to a position corresponding to the next desired test allows wheel 10 selectively to rotate the appropriate next container 3 when desired. The illustrated immunoassay ap-

paratus will in operation also require conventional pipetting or aspirating means (not shown) for moving reagents from container to container, dependent upon the precise test be carried out. Normal computer control systems programmed to provide a desired sequence of operations can also be included (not shown).

Figure 3a shows more clearly how reagent containers 2, a solid phase container 3 and pack top 4 interfit. The resulting combination can be termed a test or reagent "pack". Complete packs can be supplied for particular immunoassay tests, and individual containers can be replaced as desired by removing pack top 4. Such packs are removably mounted on the carousel 1 by reagent container formed base portions 8 and solid phase container base portions 7 fitting into corresponding recesses 17 and 13, respectively, in carousel 1. The solid phase container 3 is free to rotate in its mount. If desired, special bearings (not shown) can be positioned in recess 13 to facilitate such rotation. Such a bearing can take the form of an annulus (not shown) of low frictional coefficient plastics material.

In Figure 3b, an alternative embodiment is illustrated in which wheel 10 is provided in the form of a gear wheel adapted to mesh with gear track 18, which track is integrally moulded into the lower circumference of container 3. This permits a surer engagement between wheel 10 and container 3, and hence a more reliable transmission of the drive from motor 12.

Figure 4 shows the components of another container pack of the invention consisting of reagent containers 2, a solid phase container 3 which, in use, can be selectively rotated independently of the other containers, and a snap on reagent pack top 4 which differs from that shown in Figure 2 in that it is not cut away. The skilled man will appreciate that the precise configuration of the pack top is unimportant, only that such a pack top should allow the various containers to be linked together in the desired orientation while also allowing free access to the said containers. If desired the pack top can, for example, carry strengthening such as reinforcing ribs. It will also be appreciated that, if desired for engineering simplicity, pairs of containers 2 shown in the various Figures can be in the form of a single piece moulding, perhaps eliminating the need for a pack top.

The embodiment of Figure 4 also includes means whereby rotation of solid phase containers 3 can be monitored, comprising a reflective area 15 located on the solid phase container 3 and a fixed sensor 14 for picking up reflected light. The frequency of light pick up is proportional to the speed of rotation. Such an arrangement is especially useful in automated assay machines.

Thus, the apparatus of the present invention allows selective suspension of a solid phase component of a solid phase-containing reaction system without disturbing containers carrying other components which are present on the same platform or carrier. This is particularly useful when the reactions in question are those performed by an automated assay system, which systems

are usually designed to carry out many different test reactions, each of which may have a different solid phase component. However, the invention is not limited to such systems. Selective suspension of only those solid phase components required at a particular time may be achieved, thereby increasing the useful life of individual reaction components.

As can be appreciated, whilst the invention provides a flexible solution to the problems noted above, it is also readily adaptable to particular requirements in terms of type of suspension cycle, number of reaction components for a given reaction, type of container platform, use with different forms of automated machinery, and so on.

## Claims

1. Apparatus for assays involving suspending a particulate solid phase suspensible in aqueous media, comprising a platform (9), a discrete module removably mounted on said platform (9), said module including at least one independently rotatably mounted solid phase container (3) for containing solid phase for a plurality of assays and at least one other reagent container (2), and means (10) for selectively rotating said at least one solid phase container (3) so as in use to bring about suspension of solid phase therein, said at least one solid phase container (3) having a generally closed top with an access portion (6) via which the contents can be accessed.
2. Apparatus as claimed in claim 1 wherein platform (9) is in the form of a rotatably mounted substantially circular carousel.
3. Apparatus as claimed in claim 1 or claim 2 which is part of an automated immunoassay system, the platform (9) carrying modules including solid phase containers (3) for use in a number of separate immunoassay test types, if desired one of the solid phase containers (3) being provided for each immunoassay test type.
4. Apparatus as claimed in any one of claims 1 to 3 wherein said at least one solid phase container (3) is transparent and the apparatus further includes means for monitoring solid phase suspension therein by measuring absorption or scatter of a light beam passed through the solid phase container (3).
5. Apparatus as claimed in any one of claims 1 to 4 wherein said at least one solid phase container (3) is constructed of low frictional coefficient plastics material.
6. Apparatus as claimed in any one of claims 1 to 5 wherein said means for selectively rotating said at

least one solid phase container (3) comprises a motor-powered drive (12) carrying a drive wheel (10), and either said drive wheel (10) is capable of being brought into frictional contact with said at least one solid phase container (3) so as to rotate the same or said drive wheel (10) has a geared circumference and a gear track (18) is provided around the periphery of said at least one solid phase container (3) which geared circumference and gear track (18) are adapted to mesh.

7. Apparatus as claimed in any one of claims 1 to 6 wherein said at least one solid phase container (3) has a reflective area (15) located on the exterior thereof and said apparatus also includes a sensor (14) for monitoring light reflection thus permitting monitoring of the rotation of said at least one solid phase container (3).
8. Apparatus as claimed in any one of claims 1 to 7 wherein the containers (2,3) constituting said module are linked together by a pack top (4) which fits over the containers (2,3) without impeding the capability of said at least one container (3) to rotate.
9. A container module for use in a multi-component reaction or assay apparatus as defined in claim 1, said module being configured to fit, along with other such modules, around a substantially circular platform (1), and said module having a first and non-rotatable reagent container (2) and a second, independently rotatable solid phase container (3) for containing solid phase for a plurality of assays, said solid phase container (3) being positioned in said module to permit independent rotation thereof when said module is arranged, with other such modules, around said platform (1) with said solid phase containers (3) peripherally positioned in the resulting arrangement of modules and said solid phase container (3) having a generally closed top with an access portion (6) via which the contents can be accessed.

#### Patentansprüche

1. Vorrichtung für Analysen, welche ein Suspendieren einer in einem wäßrigen Medium suspendierbaren teilchenförmigen Festphase beinhalten, die eine Platte (9), ein lösbar auf der Platte befestigtes diskretes Modul, wobei das Modul wenigstens einen unabhängig drehbaren Festphasenbehälter (3) zur Aufnahme von fester Phase für eine Vielzahl von Analysen und wenigstens einen Reagenzbehälter (2) beinhaltet, und Mittel (10) zum selektiven Drehen des wenigstens einen Festphasenbehälters (3) umfaßt, um in Benutzung eine Suspendierung der festen Phase darin zu erzielen, wobei der wenig-

stens eine Festphasenbehälter (3) eine im allgemeinen geschlossene Oberseite mit einem Zugriffsabschnitt (6), über den auf den Inhalt zugegriffen werden kann, aufweist.

2. Vorrichtung nach Anspruch 1, worin die Platte (9) die Form eines drehbar montierten, im wesentlichen kreisförmigen Karussellwagens aufweist.
3. Vorrichtung nach Anspruch 1 oder 2, die Teil eines automatisierten Immunanalysesystemes ist, wobei die Platte (9) Festphasenbehälter (3) beinhaltende Module zur Verwendung in einer Anzahl getrennter Immunanalyse-Testtypen trägt, wobei, falls erforderlich, einer der Festphasenbehälter (3) für jeden Immunanalyse-Testtyp vorgesehen ist.
4. Vorrichtung nach jedem der Ansprüche 1 bis 3, worin der wenigstens eine Festphasenbehälter (3) transparent ist und die Vorrichtung des weiteren Mittel zur Aufzeichnung der Festphasensuspension darin durch Messung der Absorption oder Streuung eines durch den Festphasenbehälter (3) geleiteten Lichtstrahles beinhaltet.
5. Vorrichtung nach jedem der Ansprüche 1 bis 4, worin der wenigstens eine Festphasenbehälter (3) aus Kunststoffmaterial mit niedrigem Reibungskoeffizienten gefertigt ist.
6. Vorrichtung nach jedem der Ansprüche 1 bis 5, worin die Mittel zum selektiven Drehen des wenigstens einen Festphasenbehälters (3) ein motorisch betriebenes Antriebsorgan (12) mit einem Antriebsrad (10) umfaßt und jedes der Antriebsräder (10) in Reibungskontakt mit dem wenigstens einen Festphasenbehälter (3) gebracht werden kann, um denselben zu drehen oder das Antriebsrad (10) einen gezahnten Umfang aufweist und eine Zahnspur (18) um den Umfang des wenigstens einen Festphasenbehälters (3) vorgesehen ist, wobei der gezahnte Umfang und die Zahnspur zum Ineinandergreifen angepaßt sind.

7. Vorrichtung nach jedem der Ansprüche 1 bis 6, worin der wenigstens eine Festphasenbehälter (3) einen an der Außenseite davon angeordneten reflektierenden Bereich aufweist und die Vorrichtung einen Sensor (14) zur Überwachung der Lichtreflexion beinhaltet, wodurch ein Überwachen der Drehung des wenigstens einen Festphasenbehälters (3) ermöglicht ist.
8. Vorrichtung nach jedem der Ansprüche 1 bis 7, worin die Behälter (2, 3), welche das Modul bilden, durch eine Sturzoberseite miteinander verbunden sind, welche über die Behälter (2, 3) paßt, ohne die Fähigkeit des wenigstens einen Behälters (3) sich

zu drehen zu behindern.

9. Ein Behältermodul zur Verwendung in einer Multi-  
komponenten-Reaktions- oder Analysenvorrich-  
tung nach Anspruch 1, wobei das Modul so konfi-  
guriert ist, daß es zusammen mit weiteren solchen  
Modulen um eine im wesentlichen kreisförmige  
Platte (1) paßt und das Modul einen ersten, nicht  
drehbaren Reagenzbehälter (2) und einen zweiten,  
unabhängig drehbaren Festphasenbehälter (3) zur  
Aufnahme fester Phase für eine Vielzahl von Ana-  
lysen aufweist, wobei der Festphasenbehälter (3)  
in dem Modul so positioniert ist, daß eine unabhän-  
gige Drehung davon ermöglicht ist, wenn das  
Modul mit weiteren solchen Modulen um die  
Platte (1) angeordnet ist, wobei die Festphasenbe-  
hälter (3) umfänglich in der resultierenden Anord-  
nung von Modulen positioniert sind und der Fest-  
phasenbehälter (3) eine im allgemeinen geschlos-  
sene Oberseite mit einem Zugriffsabschnitt (6),  
über den auf den Inhalt zugegriffen werden kann,  
aufweist.

#### Revendications

1. Appareil pour des tests impliquant la suspension  
d'une phase solide particulière pouvant être en sus-  
pension dans un milieu aqueux, comprenant une  
plate-forme (9), un module discret monté de manière  
amovible sur ladite plate-forme (9), ledit module  
incluant au moins un conteneur (3) de phase solide  
monté de manière rotative de manière indépendan-  
te pour contenir une phase solide pour une pluralité  
de tests et au moins un autre conteneur (2) de réac-  
tif, et des moyens (10) pour mettre en rotation de  
manière sélective ledit au moins un conteneur (3)  
de phase solide de manière à, en fonctionnement,  
amener en suspension la phase solide dans celui-  
ci, ledit au moins un conteneur (3) de phase solide  
ayant une partie haute généralement fermée avec  
une partie d'accès (6) par laquelle on peut avoir ac-  
cès au contenu.
2. Appareil selon la revendication 1, dans lequel une  
plate-forme (9) est sous la forme d'un carrousel  
sensiblement circulaire monté de manière rotative.
3. Appareil selon la revendication 1 ou 2, qui est une  
partie d'un système de test immunologique automa-  
tisé, la plate-forme (9) portant des modules incluant  
des conteneurs (3) de phase solide pour une utili-  
sation dans un nombre de types de test immunolo-  
gique séparés, si souhaité un des conteneurs (3)  
de phase solide étant prévu pour chaque type de  
test immunologique.
4. Appareil selon l'une quelconque des revendications

1 à 3, dans lequel ledit au moins un conteneur (3)  
de phase solide est transparent et l'appareil inclut  
en outre des moyens pour suivre une suspension  
de phase solide dans celui-ci en mesurant l'absorp-  
tion ou la dispersion d'un faisceau lumineux passé  
à travers le conteneur (3) de phase solide.

5. Appareil selon l'une quelconque des revendications  
1 à 4, dans lequel ledit au moins un conteneur (3)  
de phase solide est construit d'un matériau plasti-  
que à faible coefficient de frottement.
6. Appareil selon l'une quelconque des appareils 1 à  
5, dans lequel ledit moyen pour mettre en rotation  
de manière sélective ledit au moins un conteneur  
(3) de phase solide comprend un actionneur entraî-  
né par un moteur (12) portant une roue d'entraîne-  
ment (10), et soit ladite roue d'entraînement (10) est  
capable d'être amenée en contact par frottement  
avec ledit au moins un conteneur (3) de phase so-  
lide de manière à tourner celui-ci, soit ladite roue  
d'entraînement (10) a une circonférence à engre-  
nage et une voie d'engrènement (18) est prévue  
autour de la périphérie dudit au moins un conteneur  
(3) de phase solide, laquelle circonférence à engre-  
nage et voie d'engrènement (18) sont adaptées  
pour s'engrener.
7. Appareil selon l'une quelconque des revendications  
1 à 6, dans lequel ledit au moins un conteneur (3)  
de phase solide a une zone réfléchissante (15) si-  
tuée sur son extérieur et ledit appareil inclut égale-  
ment un capteur (14) pour suivre la réflexion lumi-  
neuse permettant ainsi le suivi de la rotation dudit  
au moins un conteneur (3) de phase solide.
8. Appareil selon l'une quelconque des revendications  
1 à 7, dans lequel les conteneurs (2, 3) contenant  
ledit module sont liés ensemble par une partie su-  
périeure (4) de liaison qui s'ajuste sur les conte-  
neurs (2, 3) sans entraver la capacité dudit au  
moins un conteneur (3) à tourner.
9. Module de conteneur pour utilisation dans un appa-  
reil de test ou à réaction multicomposants selon la  
revendication 1, ledit module étant configuré pour  
s'ajuster, le long d'autres tels modules, autour d'une  
plate-forme (1) substantiellement circulaire, et ledit  
module ayant un premier conteneur (2) de réactif  
non rotatif et un second conteneur (3) de phase so-  
lide rotatif de manière indépendante pour contenir  
une phase solide pour une pluralité de tests, ledit  
conteneur (3) de phase solide étant positionné dans  
ledit module pour permettre une rotation indépen-  
dante de celui-ci lorsque ledit module est agencé,  
avec d'autres tels modules, autour de ladite plate-  
forme (1) avec lesdits conteneurs (3) de phase so-  
lide positionnés de manière périphérique dans ledit

agencement résultant des modules et ledit conteneur (3) de phase solide ayant une partie haute généralement fermée avec une partie d'accès (6) par laquelle on peut accéder au contenu.

5

10

15

20

25

30

35

40

45

50

55



FIG. 1.

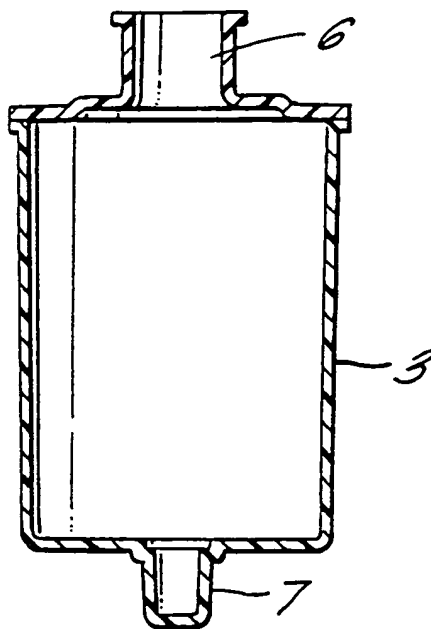


FIG. 2.

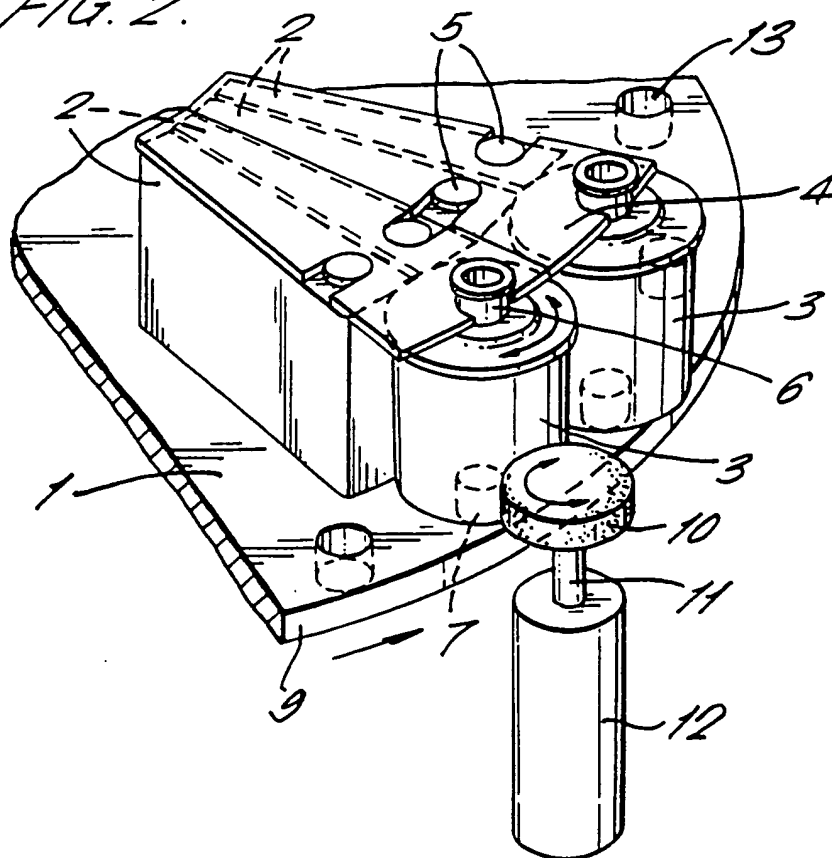


FIG. 3a

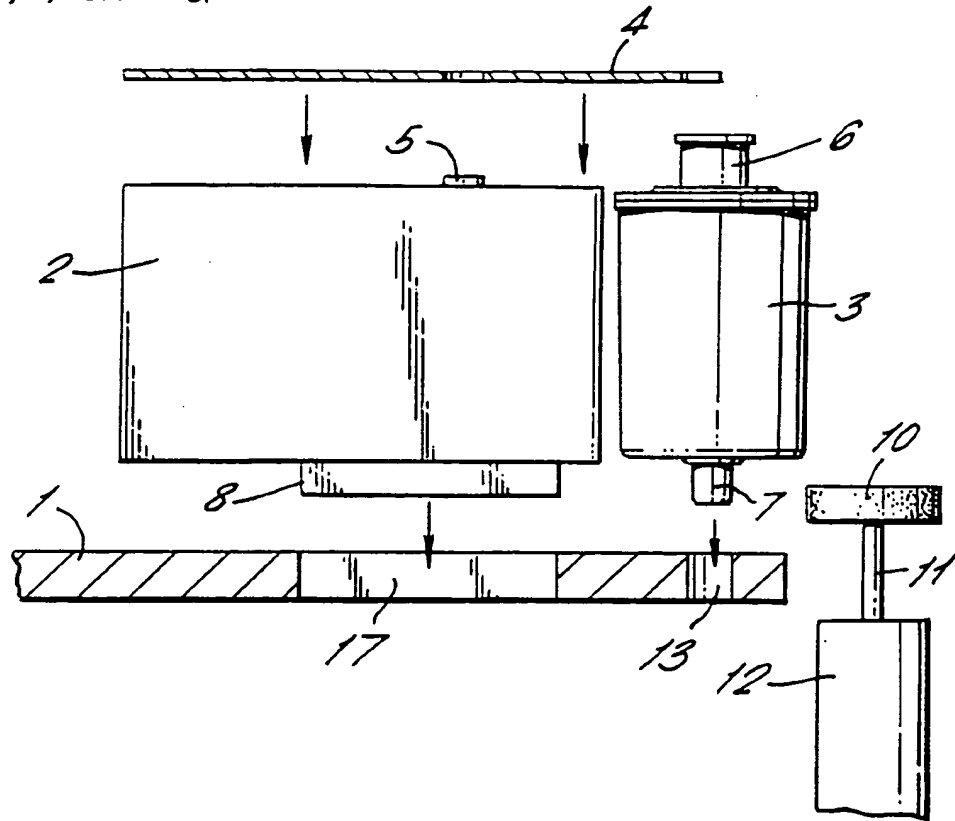


FIG. 4.

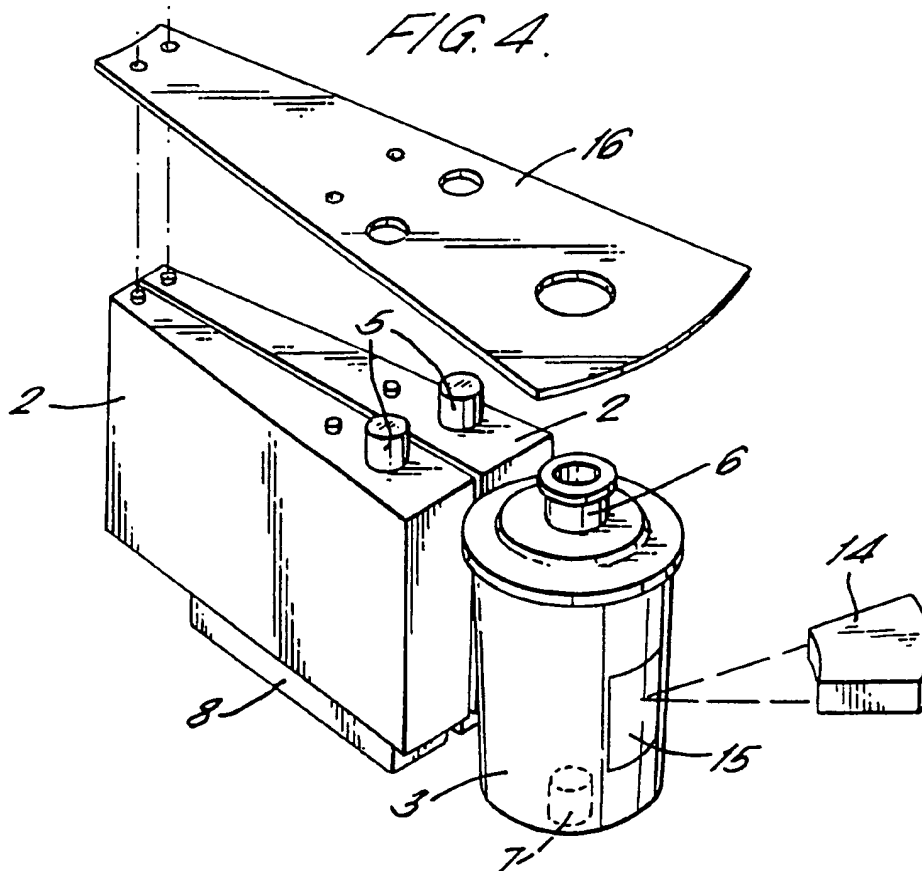


FIG. 3b

